

Werktuigbouwkunde

OKK

OKK MCV 630

Machine occasion

N° de stock : **DB3028**



Computergestuurde regeling

Fanuc Series O-M

Afmetingen tafel


1600 x 650

verschuiving draai tafel	1200
Dwarsverplaatsing	630
Verticale slag	630
Maximaal toegelaten gewicht op de plaat	1500
Minimale/maximale afstand tussen verticale spindel en tafel	200 / 830
Distance from spindle center to column	670
Spindelkegel	ISO 50
Spindelsnelheid	25 / 3500
Aantal gereedschappen	24
Max. diameter	110
Maximale lengte	350
Maximaal toegelaten gewicht	15
Vermogen	36
Gewicht	11000
Formaten	4110 x 3920
Jaar	1989


4th axis Nikken Ø: 500 mm





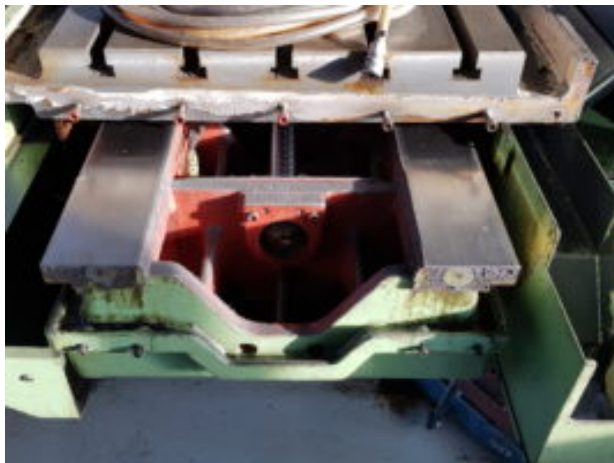



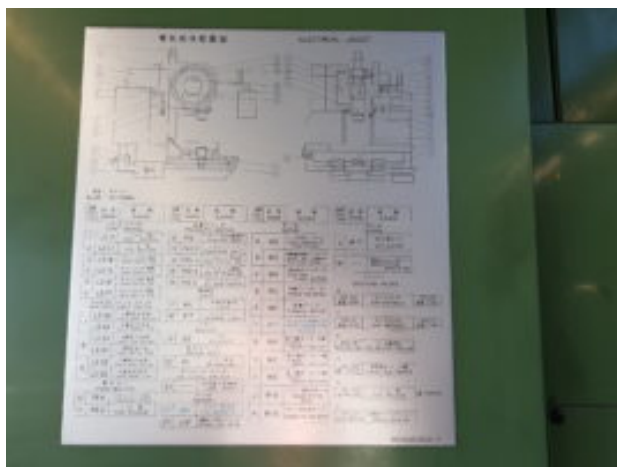

Spindle nose to table	7,875"-11,412", 203-870 mm
Spindle center to column	14,1/8", 472 mm
Spindle taper	3/8Bx10/32, 58
Spindle speed	25-3500 rpm
Spindle motor	AC 100-1500, 11kW cont. rating 20HP, 3750W 30min. rating
Rapid travel	0.5-0.8 mm/min 39.61/2" min, 12 mm/min
Feed speed	1/4"-15.7, 1/2" min., 1-4200 mm/min
Drive motor for feed drive	AC 100-200, 1.5 kW AC 5 20.5 2.2kW 3.200W 2.2 kW 5 30.5 5 10.5
Max. carrying capacity	1300 lbs., 1500 kg
Machine weight	24200 lbs., 11000 kg
Floor space required	161, 1/4-154, 1/8", 4118 x 3920 mm
Japan	50/60Hz 110V AC 200/220V +10% -15% 1φ 34kVA (stand. spec.)
Power supply	50/60Hz 110V AC 200/220/230/360/300/415/440/460 50/60Hz 110V - 15%

Hydraulic unit	
Reservoir capacity	10.5 gal., 40L
Pump motor	4P 1.5 kW, 2.2 HP
Output valves & output pressure	6 gal./min. x 500 psi 22 l/min. x 35 MPa
Attachments	Section Filter Microseparator Pressure gauge
Lubrication unit (spindle head lubrication)	
Reservoir capacity	8 gal., 30L
Pump motor	0.13 HP, 100W

